

PART NUMBER CONFIGURATION

PS K - 1 XXXX A A - 25

PAL-STRIP
 INSULATION MATERIAL
 K = KAPTON
 P = POLYESTER

- = Non RoHS
 R = RoHS


CONDUCTOR PITCH
 1 = 1.00MM (.039")
 2 = 1.25MM (.049")
 3 = 1.27MM (.050")
 4 = 1.90MM (.075")
 5 = 2.00MM (.079")
 6 = 2.54MM (.100")
 7 = 3.18MM (.125")
 8 = 3.81MM (.150")
 9 = 5.08MM (.200")

INSULATION LENGTH IN MM
 (12.7MM MIN.) (4 DIGITS MAX)

NUMBER OF CONDUCTORS
 (75 COND. MAX.)

PIN ARRANGEMENT
 (RIGHT END)

PIN ARRANGEMENT
 (LEFT END)

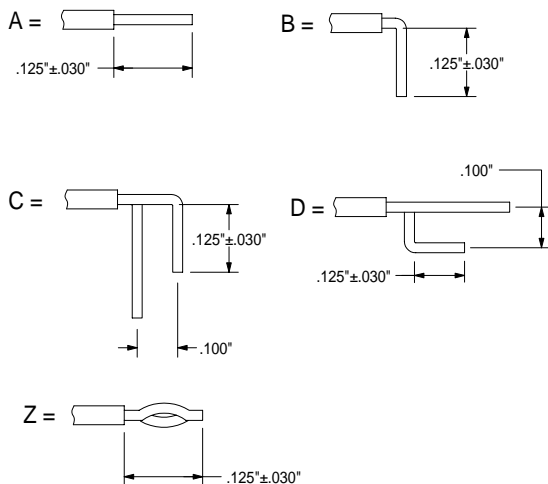

NOTE: SOME CONFIGURATIONS MAY REQUIRE TOOLING CHARGES WHEN ORDERED


INSULATION LENGTH B	TOLERANCE
0.00-3.00"	± 0.075 " (1.905MM)
3.00-6.00"	± 0.100 " (2.540MM)
6.00-12.00"	± 0.125 " (3.175MM)
12.00-18.00"	± 0.150 " (3.810MM)
18.00-24.00"	± 0.200 " (5.080MM)
24.00-36.00"	± 0.250 " (6.350MM)
OVER 36.00"	$\pm 1\%$ OF LENGTH

PITCH A ± 0.010 " *	MARGIN C	WIRE GAUGE	PIN DIA. D	(PIN END) E	# OF COND. MIN.-MAX.
1.00MM (.039")	.25MM (.010")	28	.320MM (.0126")	.64MM (.025")	2-75
1.25MM (.049")	.25MM (.010")	28	.320MM (.0126")	.64MM (.025")	2-75
1.27MM (.050")	.25MM (.010")	28	.320MM (.0126")	.64MM (.025")	2-75
1.90MM (.075")	.25MM (.010")	28	.320MM (.0126")	.64MM (.025")	2-60
2.00MM (.079")	.25MM (.010")	26	.404MM (.0159")	.84MM (.033")	2-60
2.54MM (.100")	.25MM (.010")	26	.404MM (.0159")	.84MM (.033")	2-50
3.18MM (.125")	.51MM (.020")	24	.511MM (.0201")	.84MM (.033")	2-35
3.81MM (.150")	.51MM (.020")	24	.511MM (.0201")	.84MM (.033")	2-30
5.08MM (.200")	.51MM (.020")	24	.511MM (.0201")	.84MM (.033")	2-25

* = TOLERANCE ON PITCH NON-CUMULATIVE

PROPRIETARY INFORMATION NOTICE

This document and the designs, specifications, and engineering information disclosed herein are the property of Parlex Corp., and are not to be disseminated or reproduced without expressed written consent. This document is loaned in confidence and then only for consideration of the matter disclosed hereon. In accepting loan of this document, the recipient agrees to keep it and the matter disclosed hereon in confidence and not to use or permit their use in any way detrimental to Parlex Corp.

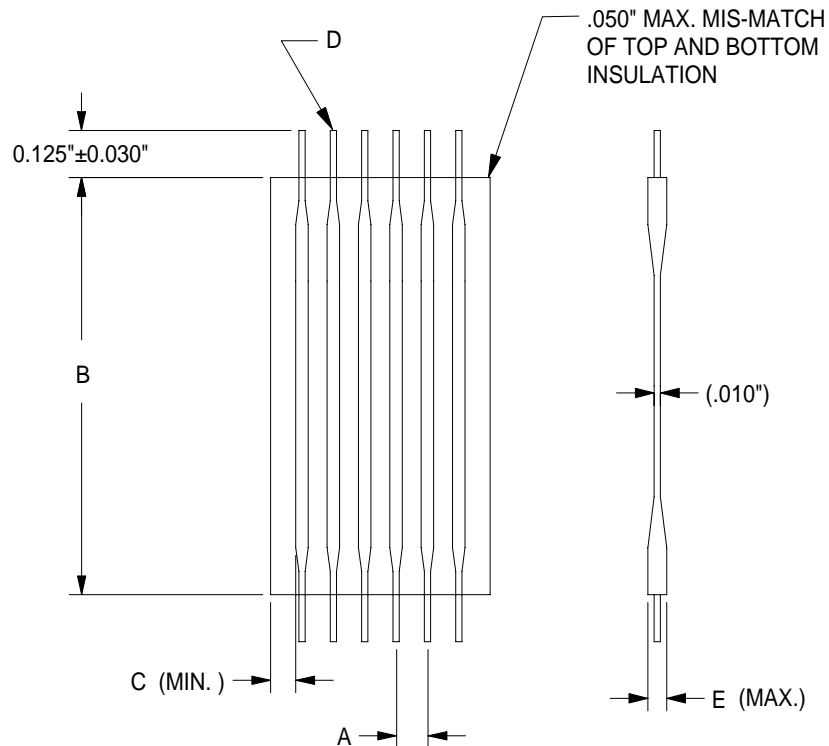

PARLEX CORPORATION
 ONE PARLEX PLACE
 METHUEN, MA 01844

LAMINATED CABLE DIVISION

ROUND TO FLAT GENERIC SPECIFICATIONS

SIZE B	FSCM 18377	PS-2227	Rev. E
SCALE NONE	SHEET 1 OF 1		