

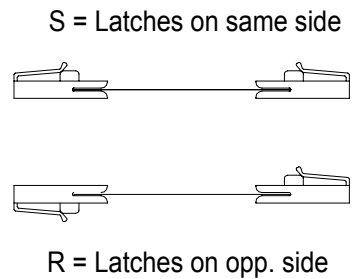


REVISIONS		DATE	APPRVD
LTR	DESCRIPTION		
-	INITIAL RELEASE	9/11/03	

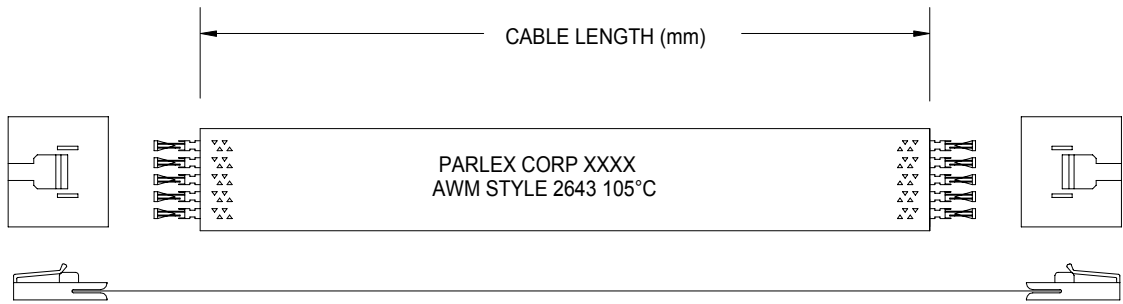

Part Number when ordering

DIMENSION		STANDARD TOLERANCES
CABLE LENGTH	0-3"	±.050" (1.27mm)
	3"-6"	±.060" (1.524mm)
	6"-12"	±.070" (1.778mm)
	12"-18"	±.110" (2.794mm)
	18"-24"	±.120" (3.048mm)
	24"-36"	±.150" (3.810mm)
	OVER 36"	±1% OF LENGTH

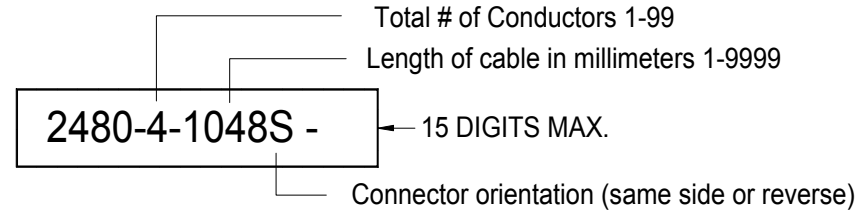

Total # of Cond's = 4
Cable Length=41.260"±0.413"

NOTES

- 1) INSULATION: 0.002" THICK POLYESTER FILM W/FLAME RETARDANT ADHESIVE
- 2) CONDUCTORS: 0.003" X 0.050" FLAT BARE COPPER
- 3) U.L. RATING: AWM STYLE 2643, 105°C, VW-1, 300V
- 4) PINS ARE AMP RECEPTACLES 487406-4
- 5) HOUSINGS ARE AMP FEMALE LATCH, .10"

TOLERANCES		MATERIAL		P ARLEX CORPORATION 7 INDUSTRIAL WAY SALEM, NH 03079 LAMINATED CABLE DIVISION		
.XXX ±	DR	DATE	2.54MM-xx-xxxx-FML/LATCH-SS or RB			
	BB	9/11/03				
.XX ±	CHK					
	ENG	BB	9/11/03			
ANGLES ±	APPD					
	SIZE		FSCM	PS-2480		Rev. -
SCALE		18377		SHEET OF		